



SPARK

modern fires™

SPARK MODERN FIRES

FIRE BOWL

VENTED DECORATIVE APPLIANCE

OWNER'S OPERATION AND INSTALLATION MANUAL

Z21.60b-2004 /
CSA 2.26b-2004

APPROVED



Tested &
Listed By



Beaverton
Oregon USA

OMNI-Test Laboratories, Inc.
Report No. 321-0-02-5

WARNING: If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury, or loss of life.

- Installation and service must be performed by a qualified installer, service agency, or the gas supplier.
- Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
- **WHAT TO DO IF YOU SMELL GAS:**
 - Do not try to light any appliance.
 - Do not touch any electrical switch; do not use any phone in your building.
 - Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.
 - If you cannot reach your gas supplier, call the fire department.

WARNING: Improper installation, adjustment, alteration, service, or maintenance can cause injury or property damage. Refer to this manual for correct installation and operational procedures. For assistance or additional information consult a qualified installer, service agency, or gas supplier.

WARNING: This appliance is for installation only in a solid-fuel burning masonry or UL127 factory-built fireplace, constructed of noncombustible material, and connected to a working flue (*see page 5 for minimum flue opening*).

WARNING: This is a gas-fired appliance. It uses air (oxygen) from the room in which it is installed. Provisions for adequate combustion and ventilation air must be provided.

INSTALLER: Leave this manual with the appliance.
CONSUMER: Retain this manual for future reference.

Version française de ce manuel est disponible à partir du site WEB : www.sparkfires.com

SAFETY INFORMATION



WARNINGS

⚠ WARNING: Keep flue open when operating unit.

IMPORTANT: Read this owner's manual carefully and completely before trying to assemble, operate, or service this Fire Bowl. Improper use of this unit can cause serious injury or death from burns, fire, explosion, electrical shock, and carbon monoxide poisoning.

⚠ DANGER: Carbon monoxide poisoning may lead to death!

Carbon Monoxide Poisoning:

Early signs of carbon monoxide poisoning resemble the flu, with headaches, dizziness, or nausea. If you have these signs, the fire bowl may not be working properly. **Get fresh air at once!** Have Fire Bowl serviced. Some people are more affected by carbon monoxide than others. These include pregnant women, people with heart or lung disease or anemia, those under the influence of alcohol, and those at high altitudes.

Natural and Propane /LP Gas:

Natural and propane /LP gases are odorless. An odor making agent is added to the gas. The odor helps you detect a gas leak. However, the odor added to the gas can fade. Gas may be present even though no odor exists.

Make certain you read and understand all warnings. Keep this manual for reference. It is your guide to safe and proper operation of this Fire Bowl.

⚠ WARNING: Any change to this Fire Bowl or its controls can be dangerous.

1. This appliance, as supplied, is only for use with the type of gas indicated on the rating plate.
2. If you smell gas:
 - shut off gas supply
 - do not try to light any appliance
 - do not touch any electrical switch; do not use any phone in your building
 - immediately call to your gas supplier from a neighbor's phone. Follow the gas supplier's instructions
 - if you cannot reach your gas supplier, call the fire department
3. Never install the Fire Bowl:
 - in a recreational vehicle
 - where curtains, furniture, clothing, or other flammable objects are less than 42 inches from the front, top, or sides of the Fire Bowl
 - in the high traffic areas
 - in windy or drafty areas
4. Before installing in a solid fuel burning fireplace, the chimney flue and firebox must be cleaned of soot, creosote, ashes and loose paint by a qualified chimney cleaner. Creosote will ignite if highly heated. Inspect chimney flue for damage.
5. You must operate the Fire Bowl with a fireplace screen in place. Make sure fireplace screen is closed before running the Fire Bowl.
6. Fire bowl is designed to be smokeless. If it ever appear to smoke, turn off appliance and call a qualified service person. **NOTE:** During initial operation, slight smoking could occur due to unit curing and the burning of manufacturing residues.
7. To reduce the creation of soot, follow the instructions in *Cleaning and Maintenance*, page 10.
8. Do not allow fans to blow directly into the fireplace. Avoid any drafts that alter burner flame patterns, as it could increase sooting.
9. Do not use a blower insert, heat exchanger insert or other accessory not approved for use with this Fire Bowl.
10. This Fire Bowl needs fresh, outside air ventilation to run properly.
11. Keep the appliance area clear and free from combustible materials, gasoline and other flammable vapors and liquids.
12. Do not burn solid fuel in the fireplace after installing the Fire Bowl. Do not use this appliance to cook food or burn paper or other objects.
13. Fire bowl becomes hot when in use. Keep children and adults away from hot surface to avoid burns or clothing ignition. Fire bowl will remain hot for a time after shut-down. Allow surface to cool before touching.
14. Carefully supervise young children when they are in the room with Fire Bowl.
15. Do not use appliance if any part has been exposed to or

under water. Immediately call a qualified service technician to inspect the room appliance and to replace any part of the control system and any gas control which has been under water.

16. Turn the bowl off and let cool before servicing, installing, or repairing. Only a qualified service person should install, service, or repair Fire Bowl.

LOCAL CODES

Install and use Fire Bowl with care. Follow local codes. In the absence of local codes, use the latest edition of The National Fuel Gas Code ANSZ223.1, also known as NFPA 54 available from:

- American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018
- National Fire Protection Association, Inc., Batterymarch Park, Quincy, MA 02269.

PRODUCT ASSEMBLY

1. Remove Fire Bowl, Base Cover, Burner Assembly, Base Assembly and Burner Media (see **Parts List**) from packaging.
2. Place Fire Bowl on the Base Assembly and tighten down the pilot bracket into pilot opening at rear of the Fire Bowl, as shown on picture.



3. Install the burner into the Fire Bowl and attach the orifice/air mixer into the end of the burner using pipe compound on the threads.



4. Attach the orifice assembly to the flex connector tube.



5. Place screen in front of pilot opening; fill the Bowl with glass media to the level of the bottom of the pilot opening.



6. Add other media being careful to leave a clear path to the pilot opening.



7. Connect the Fire Bowl to gas supply using the flex connector and shutoff valve.



8. Carefully leak test all connections following the procedure on page 5.

9. Place Base Cover over Base Assembly when the appliance is tested and operational.




WARNING: Failure to position the parts in accordance with these diagrams or failure to use only parts specially approved with this appliance may result in property damage or personal injury.

FIRE BOWL PLACEMENT:



FIRE BOWL DIMENSIONS:

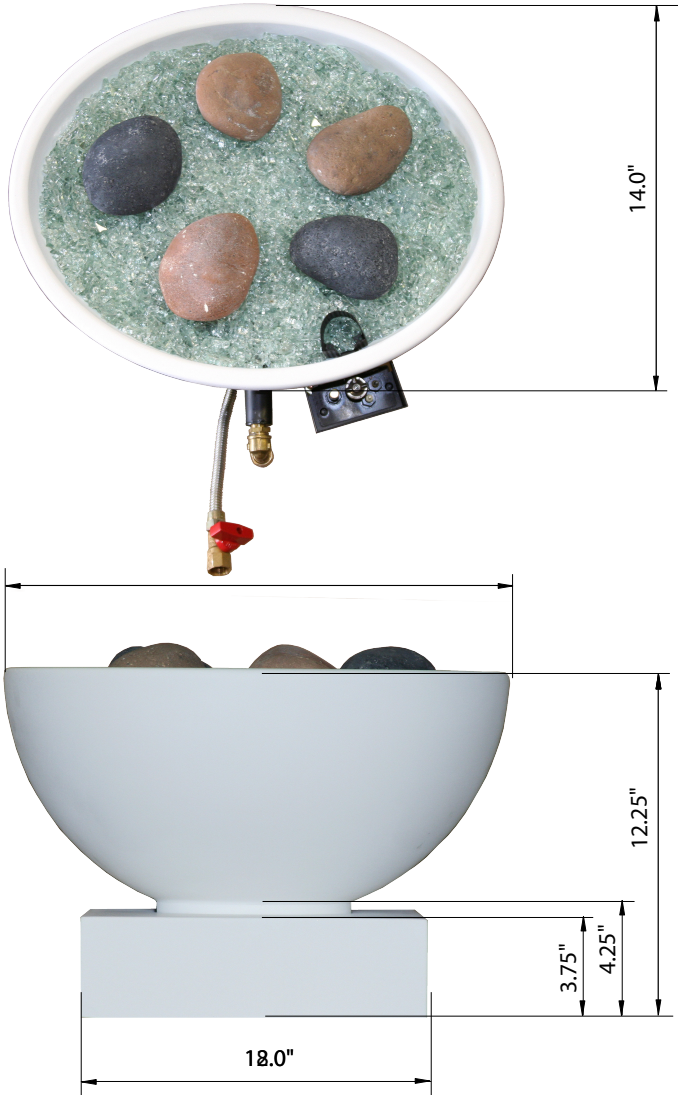

INSTALLATION

⚠ CAUTION: Do not remove the metal data plates attached to the Fire Bowl. These plates contain important information.

⚠ WARNING: Before installing in a solid fuel burning fireplace, the chimney flue and firebox must be cleaned of soot, creosote, ashes and loose paint by a qualified chimney cleaner. Creosote will ignite if highly heated. A dirty chimney flue may create and distribute soot within the house. Inspect chimney flue for damage.

NOTICE: Installation, service, and repair of this appliance must be performed by a qualified installer, service agency, company or gas supplier experienced with this type of gas appliances. Only factory authorized components listed in this instruction may be used in accordance with the manufacturer's instructions and all codes and requirements of the authority having jurisdiction. Any modifications to this appliance or use of unauthorized components or accessory items will void the manufacturer's warranty, and may result in a hazardous condition.

NOTE: This vented appliance must be installed only in a solid-fuel burning fireplace with a working flue and constructed of noncombustible material. The installation of appliances designed for manufactured home (U.S.

only) or mobile home installation must conform with the Standard CAN/CSA Z240 MH, *Mobile Housing*, in Canada, or with the *Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280*, in the USA, or when such a standard is not applicable, *ANSI/NCSBCS A225.1/NFPA 501A, Manufactured Home Installations Standard*.

The fireplace must include a working flue and venting system with minimum opening of 8" diameter. Please, make sure that the following technical data related to proper installation of the Fire Bowl are applicable before installation is attempted.

BTU input:

- for NG 27-40,000 Btu/h
- for LP 27-40,000 Btu/h

Minimum firebox size:

- Height 20"
- Front Width 30"
- Rear Width 20"
- Depth 19"

Fuel Pressure Specification:

- Inlet (NG) 4.5.-10.5" w.c.
- Manifold (NG) 3.5" w.c.
- Inlet (LP) 11-13" w.c.
- Manifold (LP) 10" w.c.

Burner orifice size (Diameter)

- for NG 0.125"
- for LP 0.070"


VENTING SPECIFICATIONS FOR INSTALLATION

The fireplace chimney flue and vent must be drafting properly. To check the vent for proper drafting:

Light a tightly rolled newspaper on the end and place it at the inside front edge of the fireplace. Observe the smoke and be sure the vent is properly drawing it up the chimney. If the smoke spills out into the room, extinguish the flame and remove any obstruction until proper venting is achieved. The chimney flue must remain open a minimum of 3" at all times during the operation of this fire bowl.

INSTALLING DAMPER CLAMP

Secure the damper stop clamp provided to the leading edge of the damper as shown below. If for any reason this clamp doesn't work on your fireplace, another suitable clamp or permanent stop must be installed, or the damper blade must be cut or removed.

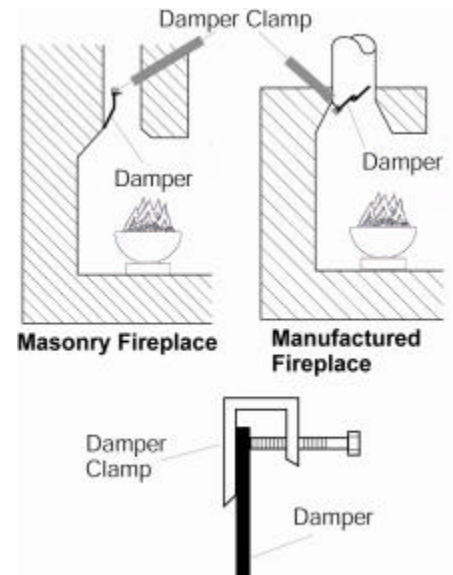

CHECK GAS TYPE

Use proper gas type for the fireplace you are installing. If you have conflicting gas type, do not install fireplace. See dealer where you purchased the fireplace for proper fireplace for your gas type or conversion kit.

INSTALLING GAS PIPING TO FIREPLACE / BURNER SYSTEM LOCATION

WARNING

A qualified installer or service person must connect appliance to gas supply. Follow all local codes.

CAUTION

For propane/LP units, never connect fireplace directly to the propane/LP supply. This burner system requires an external regulator (not supplied). Install the external regulator between the burner system and propane/LP supply.

INSTALLATION ITEMS NEEDED

Before installing fireplace and burner system, make sure you have the items listed below.

- External regulator (supplied by installer)
- Piping (check local codes)
- Sealant (resistant to propane/LP gas)
- Equipment shutoff valve*
- Test gauge connection*
- Sediment trap (recommended)
- Tee joint
- Pipe wrench
- approved flexible gas line with gas connector (if allowed by local codes — not provided)

* A CSA design-certified equipment shutoff valve with $\frac{1}{8}$ " NPT tap is an acceptable alternative to test gauge connection. Purchase the CSA design-certified equipment shutoff valve from your dealer.

For propane/LP connections only, the installer must supply an external regulator. The external regulator will reduce incoming gas pressure. You must reduce incoming gas pressure to between 11 and 13 inches of water. If you do not reduce incoming gas pressure, burner system regulator damage could occur. Install external regulator with the vent pointing down as shown in *Figure 32*. Pointing the vent down protects it from freezing rain or sleet.

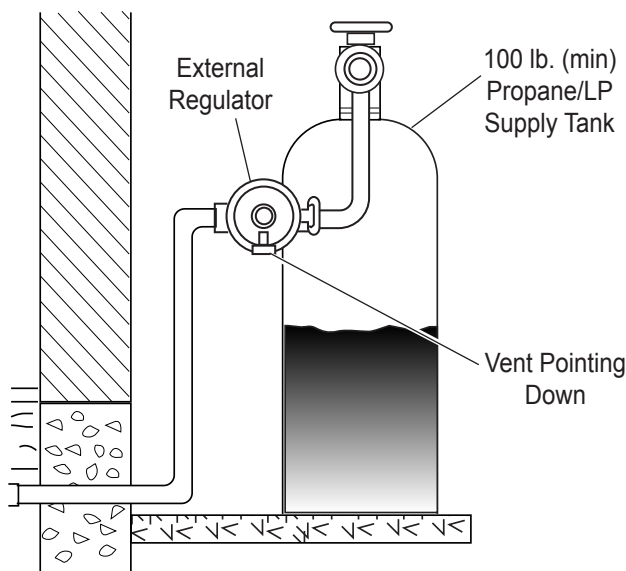


Figure 32 - External Regulator with Vent Pointing Down (Propane/LP Only)

CAUTION

Use only new black iron or steel pipe. Internally tinned copper or copper tubing can be used per National Fuel Code, section 2.6.3, providing gas meets hydrogen sulfide limits, and where permitted by local codes. Gas piping system must be sized to provide minimum inlet pressure (listed on data plate) at the maximum flow rate (BTU/hr). Undue pressure loss will occur if the pipe is too small.

When using copper or flex connectors use only fittings approved for gas connections. The gas control inlet is $\frac{3}{8}$ " NPT.

FIREPLACE INSTALLATION

WARNING

Only persons licensed to work with gas piping may make the necessary gas connections to this appliance.

CAUTION

A manual shutoff valve must be installed upstream of the appliance. Union tee and plugged $\frac{1}{8}$ " NPT pressure tapping point should be installed upstream of the appliance. See Figure 33.

NOTE : The gas line connection may be made using $\frac{1}{2}$ " rigid tubing or an approved flex connector. Since some municipalities have additional local codes it is always best to consult your local authorities and the current edition of the National Fuel Gas Code ANSI.Z223.1, NFPA54. In Canada CAN/CGA-B149 (1 or 2) Installation Code.

A listed manual shutoff valve must be installed upstream of the appliance. Union tee and plugged $\frac{1}{8}$ " NPT pressure tapping point should be installed upstream of the appliance. See Figure 33.

IMPORTANT: Install main gas valve (equipment shutoff valve) in an accessible location. The main gas valve is for turning on or shutting off the gas to the fireplace.

Check your building codes for any special requirements for locating equipment shutoff valve to fireplaces.

Apply pipe joint sealant lightly to male threads. This will prevent excess sealant from going into pipe. Excess sealant in pipe could result in clogged burner system valves.

We recommend that you install a sediment trap/drip leg in supply line as shown in Figure 33. Locate sediment trap/drip leg where it is within reach for cleaning. Install in piping system between fuel supply and burner system. Locate sediment trap/drip leg where trapped matter is not likely to freeze. A sediment trap traps moisture and contaminants. This keeps them from going into the burner system gas controls. If sediment trap/drip leg is not installed or is installed wrong, burner system may not run properly.

CAUTION

Use pipe joint sealant that is resistant to liquid petroleum (LP) gas.

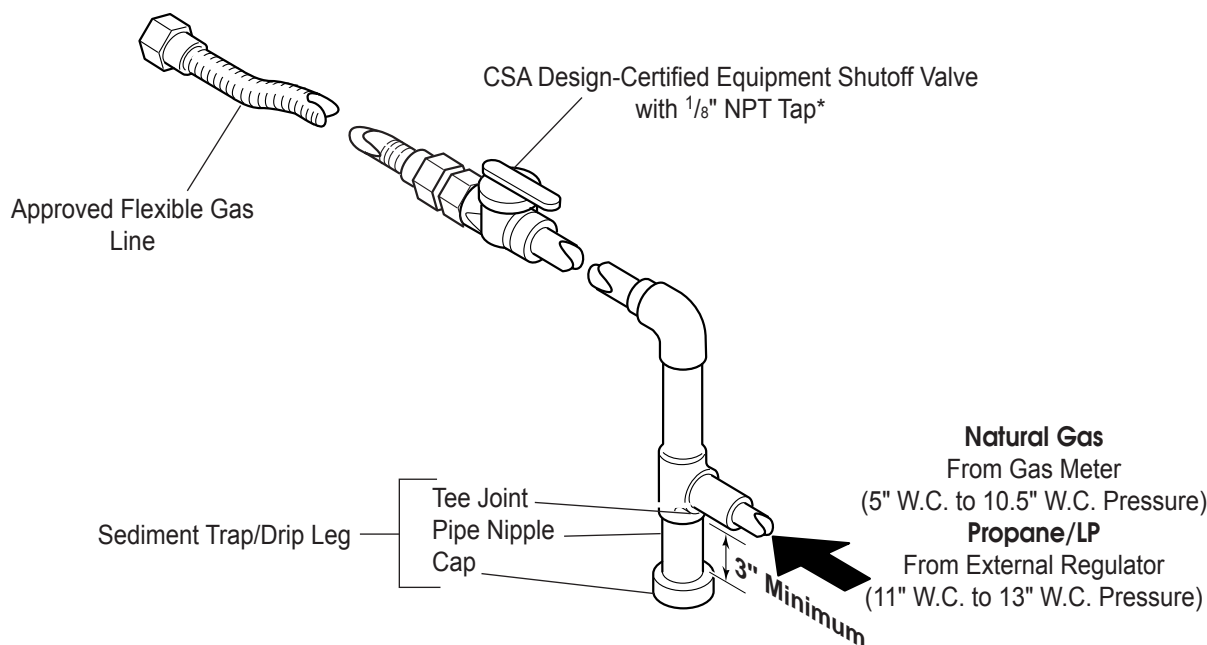


Figure 33 - Gas Connection

LIGHTING INSTRUCTION

FOR YOUR SAFETY READ BEFORE LIGHTING

WARNING

If you do not follow these instruction exactly, a fire or explosion may result causing property damage, personal injury or loss of life.

- A. This appliance is equipped with a pilot which must be lit with built-in ignitor while following these instructions exactly.
- B. BEFORE OPERATING smell all around the appliance area for gas. Be sure to smell next to the floor because some gas is heavier than air and will settle on the floor.

WHAT TO DO IF YOU SMELL GAS:

- Do not try to light any appliance.
 - Do not touch any electric switch; do not use any phone in your building.
 - Immediately call your gas supplier from a neighbor's phone.
Follow the gas supplier's instructions.
 - If you cannot reach your gas supplier, call the fire department.
- C. Use only your hand to push in, or turn the gas control knob. Never use tools. If the knob will not push in or turn by hand, don't try to repair it. Call a qualified service technician. Force or attempted repair may result in a fire or explosion.
 - D. Do not use this appliance if any part of it has been under water. Immediately call a qualified service technician to inspect the appliance and to replace any part of the control system and any gas control that has been under water.

LIGHTING PILOT FOR THE FIRST TIME

INITIAL LIGHTING

Purge air from the supply line as follows:

- Open main shutoff valve.
- Unscrew main pressure test point.
- Leave inlet test screw open until gas comes in.
- When gas is flowing, tighten inlet screw immediately.

DANGER

Never use an open flame to check for gas leak.

LEAK TESTING

1. Follow the pipe from the gas supply line connection to the gas valve. Check connection for leaks with soap and water mixture.
2. Next check for gas leaks at the burner with soap and water mixture.
3. Check the pilot for gas leaks with soap and water mixture.

LIGHTING PILOT FOR THE FIRST TIME

APPROVED LEAK TESTING METHOD

You may check for gas leaks with the following methods only:

- Soap and water solution
- An approved leak testing spray
- Electronic sniffer

DANGER

Never use an open flame to check for gas leak.

WARNING

If using a soap and water solution to test for leaks, DO NOT spray solution onto control body.



NOTE: Remove any excessive pipe compound from the connections. Excessive pipe compound can set off electronic sniffers.

Check for gas leaks in each of the following locations:

- Pipe from the gas supply line connection to the gas valve
- Burner connections, pilot
- All joints on valve and control body
- Field made joints / gas shutoff valve
- Factory made joints, each joint and connection

LIGHTING INSTRUCTIONS

1. STOP! Read the safety information on previous page.
2. Remove lower cover.
3. Turn the gas control knob to the "OFF" position.
4. Wait five (5) minutes to clear out any gas. If you then smell gas, STOP! Follow "B" in the safety information on the previous page. If you don't smell gas, go to the next step.
5. Locate the Pilot Assembly on the back of Fire Bowl

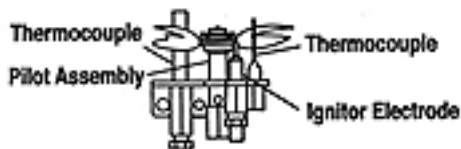

Knob at Pilot Position

6. Depress and turn pilot gas knob counterclockwise to "PILOT" position.

7. Depress fully and hold pilot gas knob.

Repeatedly push spark ignitor button to light pilot.


Keep knob fully depressed for a few seconds. Release and check that pilot continues to burn.

- If the pilot does not stay lit, repeat steps 1 and 2.
- If the pilot knob does not pop up when released, STOP and immediately call service technician or gas supplier
- If the pilot will not stay lit after several tries, turn the gas control knob to "OFF" position and call your service technician or gas supplier.

LIGHTING BURNER


MAIN BURNER SWITCH

The “ON/OFF” switch for the main burner can be found behind the cover. This switch allows you to turn on and to turn off the main burner without using the gas valve knob. Make sure the button is in the “ON” position to light the main burner.




On/Off Switch

LIGHTING THE BURNER


Depress and turn the knob counterclockwise  to the “ON” position. It will take less than four (4) seconds for the burner to ignite.

PILOT POSITION

Depress and turn knob to pilot position to keep burner off while maintaining the pilot light.





Pilot Position

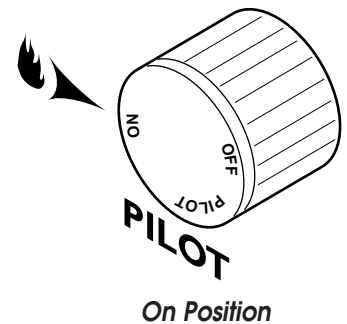

On Position

TO TURN OFF GAS TO APPLIANCE

1. **Remove lower cover.** Depress and turn knob clockwise  to “OFF” position.
2. **Replace lower cover.**



Off Position

CLEANING AND MAINTENANCE

WARNING

Turn off gas before servicing fireplace. It is recommended that a qualified service technician perform these check-ups at the beginning of each heating season.

BURNER, PILOT AND CONTROL COMPARTMENT

Keep the control compartment clean by vacuuming or brushing at least twice a year. Make sure the burner porting, pilot air opening and burner air opening are free of obstructions at all times.

PILOT FLAME


The flames from the pilot should be visually checked as soon as the unit is installed and periodically during normal operation. **The pilot flame must always be present when the fireplace is in operation.** The pilot flame has three distinct flames, one engulfing the thermopile, one engulfing the thermocouple, and the other reaching to the main burner.

BURNER

Inspect area around the injector. Remove any lint or foreign material with a brush or vacuum.

VENTING SYSTEM

Have the venting system of the solid fuel burning fireplace inspected and cleaned annually by a qualified agency.

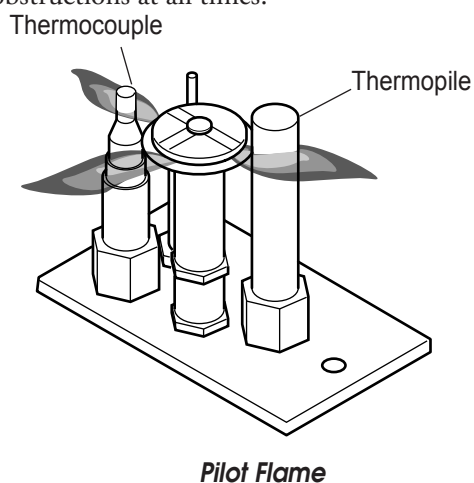

TROUBLESHOOTING



⚠ WARNING: Turn off Fire Bowl and let cool before servicing. Only a qualified service person should service and repair this appliance.

Note: All troubleshooting items are listed in order of operation.


| POSSIBLE CAUSE | REMEDY | |
|---|---|--|
| Unit is smoking / sooting excessively <i>(Note: It is natural and unavoidable for appliance sets to produce moderate levels of carbon (soot) where flames contact the media. This is especially true with propane/LP gas.)</i> | 1. Poor fuel quality 2. Fireplace venting system not drafting properly 3. Excessive flame impingement or blockage 4. Improper fuel/air mixture 5. Excessive gas supply/pressure | 1. Contact local natural or propane/LP gas company 2. Adjust damper wide open and/or have fireplace and venting professionally cleaned and checked 3. Separate the stones to allow more flame passage 4. Remove any foreign items from the flame pattern and/or check for proper orifice sizing 5. Preheat flue in very cold weather |
| Burner is excessively noisy <i>(Note: The movement and combustion of gas will create low, unavoidable levels of noise.)</i> | 1. Passage of air/gas across irregular surfaces 2. Excessive gas pressure on natural gas units | 1. Relieve any tight bends or kinks in gas supply line 2. Check/reset gas regulator pressure |
| Burner flame is too low or too high | 1. Incorrect gas supply or pressure 2. Blocked burner orifice or burner manifold ports 3. Improper burner orifice size | 1. Check for proper gas supply pressure 2. Free burner orifice and manifold ports of any burrs, paint, or other blockage 3. Verify proper burner orifice sizing (see page 5) |
| Remote does not function | 1. Battery is not installed. Battery power is low | 1. Replace batteries in receiver and remote control |

| OBSERVED PROBLEM | POSSIBLE CAUSE | REMEDY |
|---|---|--|
| When ignitor button is pressed, there is no spark at pilot | <ol style="list-style-type: none"> 1. Ignitor electrode not connected to ignitor cable 2. Ignitor cable pinched or wet 3. Bad ground on piezo ignitor 4. Broken ignitor cable 5. Bad piezo ignitor 6. Ignitor electrode broken 7. Ignitor electrode positioned wrong | <ol style="list-style-type: none"> 1. Reconnect ignitor cable 2. Free ignitor cable if pinched by any metal or tubing. Keep ignitor cable dry 3. Scrape away paint on bracket for better contact with ground on piezo ignitor 4. Replace ignitor cable 5. Replace piezo ignitor 6. Replace electrode 7. Reposition electrode |
| When ignitor button is pressed, there is spark at pilot but no ignition | <ol style="list-style-type: none"> 1. Gas supply turned off or manual shutoff valve closed 2. Control knob not in PILOT position 3. Control knob not pressed in while in PILOT position 4. Air in gas lines when installed 5. Pilot adjustment screw closed 6. Pilot is clogged 7. Low gas pressure | <ol style="list-style-type: none"> 1. Turn on gas supply or open manual shutoff valve 2. Turn control knob to PILOT position 3. Press in control knob while in PILOT position 4. Continue holding down control knob. Repeat igniting operation until air is removed 5. Adjust pilot flame for approximately 1" blue flame 6. Clean pilot (see <i>Cleaning and Maintenance</i>, page 10) or replace pilot assembly. 7. Replace gas control |
| Pilot lights but flame goes out when control knob is released | <ol style="list-style-type: none"> 1. Control knob not fully pressed in 2. Control knob not pressed in long enough 3. Manual shutoff valve not fully open 4. Pilot flame not touching thermocouple, which allows thermocouple to cool, causing pilot flame to go out. This problem could be caused by one or both of the following: A) Low gas pressure B) Dirty or partially clogged pilot 5. Thermocouple connection loose at control valve 6. Thermocouple damaged 7. Control valve damaged | <ol style="list-style-type: none"> 1. Press in control knob fully 2. After pilot lights, keep control knob pressed in 30 seconds 3. Fully open manual shut-off valve 4. A) Contact local natural gas company B) Clean pilot (see <i>Cleaning and Maintenance</i>, page 9) or replace pilot assembly 5. Hand tighten until snug, then tighten 1/4 turn more 6. Replace thermocouple 7. Replace control valve |
| Burner does not light after pilot is lit | <ol style="list-style-type: none"> 1. Burner orifice clogged 2. Inlet gas pressure is too low 3. Burner orifice diameter is too small 4. Thermocouple leads disconnected or improperly connected | <ol style="list-style-type: none"> 1. Clean burner orifice 2. Contact local natural or propane/LP gas company 3. Replace burner orifice 4. Reconnect leads |
| Delayed ignition burner | <ol style="list-style-type: none"> 1. Pilot flame needs adjusting | <ol style="list-style-type: none"> 1. Adjust pilot flame for approximately 1" blue flame |

ILLUSTRATED PARTS LIST

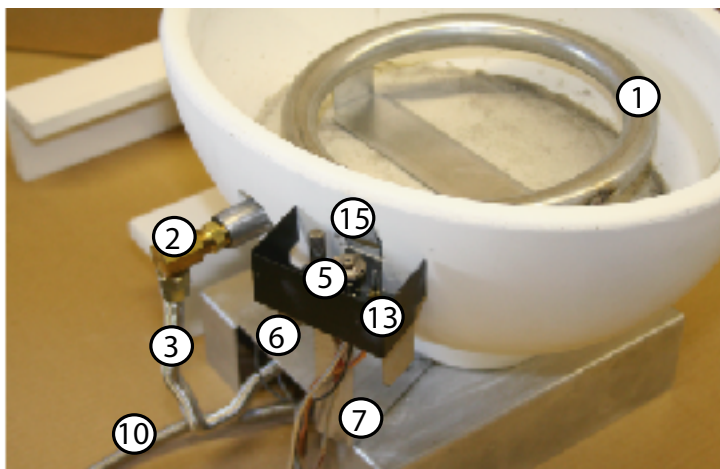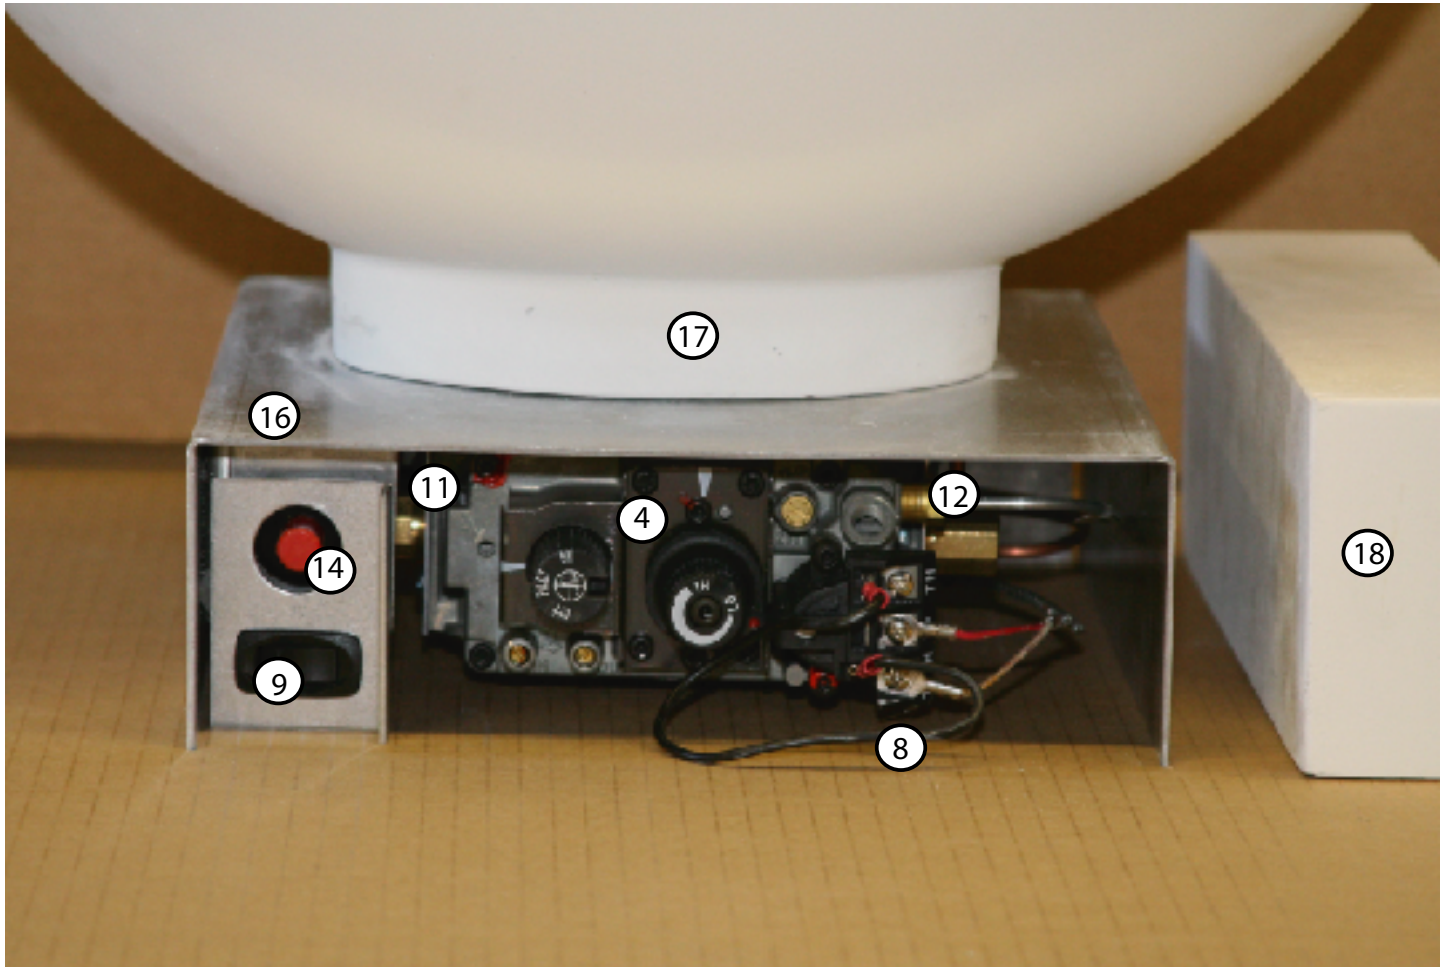

NATURAL GAS

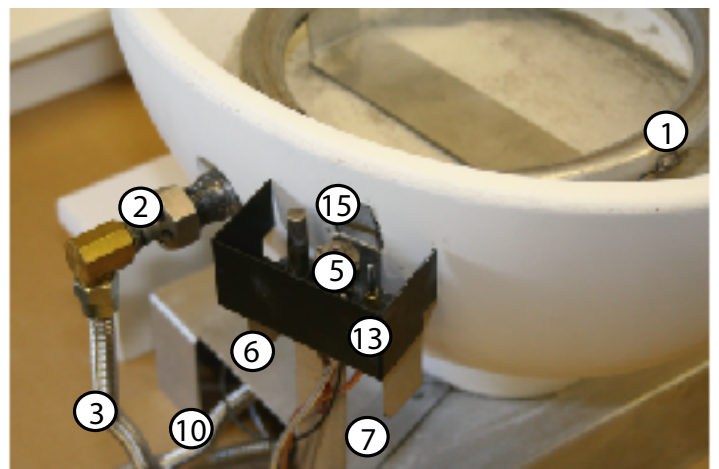

PROPANE / LP

SEE NEXT PAGE

PARTS LIST

This list contains replaceable parts used in your firebox

| KEY NO. | PART NUMBER | | DESCRIPTION | QTY |
|---|-------------|----------|--------------------------------|-----|
| | FB-N | FB-P | | |
| 1 | F200003 | F200004 | BURNER ASSEMBLY | 1 |
| 2 | F200014 | F200013 | ORIFICE/ AIR MIXER | 1 |
| 3 | F200061 | F200061 | BURNER CONNECTOR | 1 |
| 4 | C100001 | C100002 | MAIN GAS VALVE | 1 |
| 5 | C100003 | C100004 | PILOT ASSEMBLY | 1 |
| 6 | F100028 | F100028 | PILOT BRACKET | 1 |
| 7 | F100030 | F100030 | PILOT MOUNT | 1 |
| 8 | C100024 | C100024 | WIRE ASSEMBLY | 1 |
| 9 | C100018 | C100018 | ON/OFF SWITCH | 1 |
| 10 | C100009 | C100009 | FLEXHOSE/SHUTOFF | 1 |
| 11 | F100034L | F100034L | VALVE BRACKET "L" | 1 |
| 12 | F100034R | F100034R | VALVE BRACKET "R" | 1 |
| 13 | F100035 | F100035 | PILOT SHIELD | 1 |
| 14 | C100014 | C100014 | SPARK IGNITOR | 1 |
| 15 | F100033 | F100033 | FLAME SHIELD | 1 |
| 16 | F100027 | F100027 | FIREBOWL BASE | 1 |
| 17 | F200500 | F200500 | FIREBOWL | 1 |
| 18 | F200501 | F200501 | FIREBOWL BASE COVER | 1 |
| 19 | F200503 | F200503 | GLASS MEDIA (NOT SHOWN) | 1 |
| 20 | F100037 | F100037 | DAMPER CLAMP (NOT SHOWN) | 1 |
| 21 | xxxxxx | xxxxxx | SURFACE MEDIA (MANY AVAILABLE) | 1 |
| ACCESSORIES AVAILABLE (NOT SHOWN): | | | | |
| | RCB | RCB | REMOTE ON/OFF | |

WARRANTY INFORMATION

KEEP THIS FOR WARRANTY

| |
|----------------------|
| Model _____ |
| Serial No. _____ |
| Date Purchased _____ |

Always specify model and serial numbers when communicating with the factory.

LIMITED LIFETIME WARRANTY

The following components are warranted for life to the original owner, subject to proof of purchase: Fire Bowl, Base, and Steel Burner.

BASIC WARRANTY

Spark Modern Fires warrants the components and materials in your gas appliance to be free from manufacturing and material defects for a period of two years from date of installation. After installation, if any of the components manufactured by Spark Modern Fires in the appliance are found to be defective in materials or workmanship, Spark Modern Fires will, at its option, replace or repair the defective components at no charge to the original owner. Spark Modern Fires will also pay for reasonable labor cost incurred in replacing or repairing such components for a period of two years from date of installation. Any products presented for warranty repair must be accompanied by a dated proof of purchase.

This Limited Lifetime Warranty will be void if the appliance is not installed by a qualified installer in accordance with installation instructions. The Limited Lifetime Warranty will also be void if the appliance is not operated and maintained according to the operating instructions supplied with the appliance, and does not extend to (1) firebox/burner assembly damaged by accident, neglect, misuse, abuse, alterations, negligence of others, including the installation thereof by unqualified installers, (2) the costs of removal, reinstallation or transportation of defective parts on the appliance, or (3) incidental or consequential damage. All service work must be performed by an authorized service representative.

This warranty is expressly in lieu of other warranties, express or implied, including the warranty of merchantability of fitness for purpose and of all other obligations or liabilities. Spark Modern Fires does not assume for it any other obligations or liabilities in connection with sale or use of the appliance. It states that do not allow limitations on how long an implied warranty lasts, or do not allow exclusion of indirect damage, those limitations of exclusions may not apply to you. You may also have additional right not covered in the Limited Lifetime Warranty. Spark Modern Fires reserves the right to investigate any and all the claims against this Warranty and decide upon method of settlement. For information about this warranty contact:

Spark Modern Fires
53 Chestnut Woods Rd.
Redding, CT 06896
U.S.A.